



Office de la propriété
intellectuelle
du Canada

Un organisme
d'Industrie Canada

Canadian
Intellectual Property
Office

An Agency of
Industry Canada

*Bureau canadien
des brevets*
Certification

*Canadian Patent
Office*
Certification

La présente atteste que les documents
ci-joints, dont la liste figure ci-dessous,
sont des copies authentiques des docu-
ments déposés au Bureau des brevets.

This is to certify that the documents
attached hereto and identified below are
true copies of the documents on file in
the Patent Office.

Specification and Drawings, as originally filed, with Application for Patent Serial No:
2,419,305, on February 20, 2003, by **IBM CANADA LIMITED - IBM CANADA
LIMITÉE**, assignee of Alex K. Tsui, Paul (Ming) Chen, Michael G. Polan and Arnold
Rosen, for "Unified Logging Service for Distributed Applications".


Agent certificateur/Certifying Officer

May 8, 2003

Date

Canada

(CIPD 68)
04-09-02

OPIC  CIPO

ABSTRACT

A unified logging service is provided which may be employed across a variety of applications, allowing collected information to be stored, aggregated, and accumulated; presenting a more complete view, than previously available, related to those applications. The unified logging service provides a generalized centralized web services based service with the capability of accepting and collecting a variety of log formats containing a variety of logged events. These events may originate from clients using differing log formats or types in a heterogeneous distributed computing environment. Acknowledgement of receipt of log files may be provided to the originating clients. A log routing capability is also provided as well as a central repository for storing and forwarding log messages flowing throughout the system. These services may be accessed locally or remotely via published web services interfaces.

UNIFIED LOGGING SERVICE FOR DISTRIBUTED APPLICATIONS

5 FIELD OF THE INVENTION

[0001] This present invention relates generally to the logging of events generated by computer applications, and more particularly to the unified logging of events generated by computer applications distributed across a network.

10 BACKGROUND OF THE INVENTION

[0002] Event logging has been known since the early days of sailing. Today in computer based systems and applications the idea of logging has taken new meaning. The recording of event occurrence information is the act of logging. The data captured is placed in storage devices and later processed in a variety of ways. The processing typically involves problem determination, recovery or statistical analysis to derive information related to system as well as application usage or behaviour.

[0003] Some computer systems include logging services to maintain system specific information. Such information may be stored on a local device for later use. Cases of remote logging are also known wherein the log information is transmitted over a network and stored at a location remote from the source of the logged event. Remote logging requires the knowledge of host system information to keep track of the source.

[0004] Applications which operate on top of system operating systems also create events and record the occurrence of such events. These log files are created and maintained for the purpose of monitoring application activity and status of components or other objects and activities important to the operation of the application and the care of the data created. Application log files tend to be application specific in content and

format. These log files as in the case with system log files tend to be created and maintained in close proximity to the source. When such log files are remote they have the same requirements as do the system based log files, that is the identification of the source of the information which includes some form of network addressing.

5 **[0005]** Even when log files are collected from remote locations the collected log files are maintained in the same form as they were created. This creates islands of log data wherein each island is tailored to a specific kind or format of log. Interface requirements of each log type are known and required to input and extract information from the respective log files.

10 **[0006]** The uniqueness of the log file across applications and systems causes operation concern as system and application administrators cope with the varying requirements. The uniqueness also inhibits the data sharing across log types or formats. Problems requiring data from multiple log sources typically requires the involvement of multiple people each having skill in interpreting and working with
15 particular logs or log formats. For example an application problem may be resolved after investigating the system, application and network logs; each involving a separate person and set of tools.

20 **[0007]** As the data formats of the various logs differ so have the tools used to maintain and report on log data. Additional tools require more time and money for obtaining, training and maintaining.

SUMMARY OF THE INVENTION

25 **[0008]** Conveniently, software exemplary of the present invention allows the collection of specific information associated with an application or a system, such as the transactional information of an application collected in the form of log files to be gathered in a location which may be separate from the location of the source and combined with a similar type of information from other dissimilar sources.

[0009] Advantageously, the technique may be employed across a variety of applications, allowing collected information to be stored, aggregated, and accumulated; presenting a more complete view related to those applications.

5 [0010] The unified logging service is provided as a generalized, centralized web services based service. This service has the capability of accepting and collecting a variety of log formats containing a variety of logged events. These events may originate from clients using differing log formats or types in a heterogeneous distributed computing environment.

10 [0011] A log routing capability is also provided as well as a central repository for storing and forwarding log messages flowing throughout the system.

15 [0012] These services may be accessed locally or remotely via published web services interfaces. There are typically no restrictions on the common format of the stored log information or consistent interfaces of the logging service. This allows the handling of different logs in different formats under different computing environments. XML has been used to provide the flexibility required to transform log objects as they enter and leave the unified logging service, making these objects more portable and compatible than before.

20 [0013] In a hosting service platform various types of logs are typically generated from the hosted applications and services as well as from the actual components of the hosting system platform itself. A unified logging service must therefore be versatile to handle the variety of log formats encountered. This unified logging service is designed to provide a generalized service with a logging interface for viewing the logs from various log clients where these clients were the originators of the logged events.

25 [0014] The specific log formats generated by the log clients can be restructured using log adapters and log renderers. The log adapters and renderers are paired to work in conjunction with specific log formats using XML based services to format log information for transmission into and out of the unified log service. Processing of the

received log file by the unified log service uses the same log renderers to restructure the log file for return to the original specific log format.

5 [0015] Using a well known publish and subscribe mechanism allows differing log type to be identified and routed to the appropriate log handler that has subscribed to those types of logs previously. Through the use of different log handlers the log files can be forwarded to other log system or stored in a log file repository.

10 [0016] In one aspect of the invention there is provided a method of providing a unified logging service, for use in a network having a plurality of nodes capable of generating event logs, wherein the unified logging service having a unified log server and repository, comprising the steps of converting an event log file of a first log type and structure associated with a sending node into a predefined format and transmitting the converted event log file over said network to said unified log server. The unified log server receiving the converted event log file, determining the log type of the converted log file and routing the converted log file to a log handler compatible with the log type and the predefined format. Identifying a receiving node compatible with the log type for the converted event log file, and forwarding the converted event log file from the log handler to the identified receiving node.

20 [0017] In another aspect of the invention, there is provided an apparatus for providing a unified logging service, used with event log files having a first log type and structure, for use in a network having a plurality of nodes capable of generating event log files, comprising a unified logging server, means for receiving said event log file at said unified logging server, a log adapter for converting said event log file from said first protocol to a predefined format, means for determining a log type of said converted event log file and a log handler suitable for said log type, means for forwarding said converted event log file to said log handler, means for identifying a receiving node, and means for forwarding said converted event log file to said identified receiving node.

25 [0018] In yet another aspect of the invention, there is provided a system for

providing a unified logging service, for use in a network having a plurality of nodes capable of generating vent logs, wherein the unified logging service having a unified log server and repository, comprising a sending node having a first log type and structure, an event log file having a first log type associated with the sending node, a log adapter for the sending node for converting the event log file from the first protocol to a predefined format, and means for transmitting the converted event log file across the network to the unified logging server. Additionally, means for receiving the converted event log file at the unified logging server, means for determining the log type of said converted event log file and a log handler suitable for the log type, means for forwarding the converted event log file to the log handler, means for identifying a receiving node for the converted event log file, and means for forwarding said converted event log file to the identified receiving node.

[0019] Other aspects and features of the present invention will become apparent to those of ordinary skill in the art upon review of the following description of specific embodiments of the invention in conjunction with the accompanying figures.

BRIEF DESCRIPTION OF THE DRAWINGS

[0020] In the figures, which illustrate embodiments of the present invention by example only,

[0021] FIG.1 is a hardware overview of a network including at least one unified log server for collecting heterogeneous log information, several application computing devices, and at least one client computing device, exemplary of embodiments of the present invention;

[0022] FIG. 2 illustrates exemplary hardware architecture of a unified log server of FIG.1;

[0023] FIG. 3 illustrates a first exemplary software architecture of a unified log

server of FIG. 1;

[0024] FIG. 4 illustrates a process flow of a unified log server of FIG. 3;

[0025] FIG. 5 illustrates a second exemplary software architecture of a unified log server of FIG. 1;

5 [0026] FIG. 6 illustrates a process flow of a unified log server of FIG. 5

[0027] FIG. 7 is a class diagram of interface and implementation classes of an exemplary embodiment of a unified log server of FIG. 3;

[0028] FIG. 8 is an object model diagram of an exemplary embodiment a unified log server of FIG. 3;

10 [0029] FIG. 9 is a code example of definitions associating a log type to an internal processing format of exemplary embodiment of FIG.3;

[0030] FIG. 10 is a code example of invoking a web service interface in an embodiment of a unified log server of FIG. 3;

15 [0031] FIG. 11 is a code example of adapter code in an embodiment of a unified log server of FIG. 3; and

[0032] FIG. 12 is a code example of a configuration file of a unified log server of FIG. 3.

DETAILED DESCRIPTION

20 [0033] FIG. 1 illustrates an exemplary data communications network 20, interconnected with a server 50, in communication with a plurality of computing devices 40a, 40b and 40c (individually and collectively devices 40), exemplary of embodiments of the present invention. A client computing device 30 in communication with network 20 to establish communication with server 50 is also illustrated. Computing devices 40

and client computing device **30** are differing examples of sending and receiving nodes. Determination of being a sending or a receiving node is based on the circumstance of communication with server **50**.

[0034] Computing devices **40**, client computing device **30** and data collection server **50** are all conventional computing devices, each including a processor and computer readable memory storing an operating system and software applications and components for execution.

[0035] Data communications network **20** may for example be a conventional local area network that adheres to suitable network protocol such as the Ethernet, token ring or similar protocols. Alternatively, the network protocol may be compliant with higher level protocols such as the Internet protocol (IP), Appletalk, or IPX protocols. Similarly, network **20** may be a wide area network, or the public internet.

[0036] Client computing device **30** is a network aware computing device, providing an end-user interface that allows an end-user to exchange and view information stored at server **50**.

[0037] Computing devices **40** are computing devices storing and executing data processing, data storage or similar applications. Often such computing devices are referred to as application servers. As will become apparent, applications at each device **30** and **40** store data such as log files for their own use and processing, typically on computer storage memory at devices **30** and **40**.

[0038] Server **50** collects log file information from computing devices **30** and **40**, by way of component software stored and executing at computing devices **30** and **40**. Collected information is stored at server **50** for viewing and analysis, for example by way of client computing devices **30** and **40**.

[0039] Simplified preferred hardware architecture of an example computing device **50** is schematically illustrated in **FIG. 2**. In the illustrated embodiment, device **50**

is a conventional network capable server. Device 50 could, for example, be an Intel x86 based computer acting as a Microsoft Windows NT, Apple, or Unix based server, workstation, personal computer or the like. Example device 50 includes a processor 12, in communication with computer storage memory 14; network interface 16; input output interface 18; and video adapter 22. As well, device 50 may optionally include a display 24 interconnected with adapter 22; input/output devices, such as a keyboard 26 and disk drive 28 and a mouse (not shown) or the like. Processor 12 is typically a conventional central processing unit, and may for example be a microprocessor in the INTEL x86 family. Of course, processor 12 could be any other suitable processor known to those skilled in the art. Computer storage memory 14 includes a suitable combination of random access memory, read-only-memory, and disk storage memory used by device 12 to store and execute software programs adapting device 12 to function in manners exemplary of the present invention. Drive 28 is capable of reading and writing data to or from a computer readable medium 32 used to store software and data to be loaded into memory 14. Computer readable medium 32 may be a CD-ROM, diskette, tape, ROM-Cartridge or the like or other large capacity storage. Network interface 26 is any interface suitable to physically link device 10 to network 16. Interface 26 may, for example, be an Ethernet, ATM, ISDN interface or modem that may be used to pass data from and to network 20 or another suitable communications network.

[0040] The hardware architectures of computing devices 40 and client computing device 30 are materially similar to that of server 50, and will therefore not be further detailed.

[0041] FIG. 3 schematically illustrates first exemplary software architecture of a unified log server of FIG. 1.

[0042] Client 30 is shown comprising log client 32, log renderer 34 and log adapter 36. Log renderer 34 and log client adapter 36 although shown in relation to client 30 need not be located with client 30 as they may be disposed at server 50 of

FIG.1. Log client 32 produces the events that are captured via logging means. Log
renderer 34 is exemplary software used by log adapter 32 to format a particular log file
into presentable format for log client 32. Log client adapter 36 is exemplary software
that restructures log file data into a common format for transmission to unified logging
service 50.

[0043] Client 40 is another embodiment of client 30, wherein client 40 comprises
log client 42, having log adapter 44 using log renderer 46. Similar components function
as in client 30.

[0044] Log files move between client 30 and server 50 by means of the common
logging web services 52 interface. Common logging service and unified logging service
may be used interchangeably throughout the following description and is to be taken as
meaning the same. The web services based logging interface is one that can be
published to a public service directory for use with Universal Data Description and
Interchange (UDDI). If client 30 has implemented log adapter 36 then a log file coming
from client 30 would be prepared in a common log file format by log adapter 36. If log
adapter 36 was not implemented at client 30 then the log file from client 30 would be
transmitted to log adapter 36 implemented on server 50. A log file of client 30 would
have a first log type and structure associated the file. Log adapter 36 would perform
restructuring as required in accordance with the type of log and differences described
between the source log format and the common log format of server 50. The unified log
service can be public and subscribed to externally from the enterprise. There is also
potential to provide the service as a billable service (user pay).

[0045] Log processor 54 has a capability of recognizing different log types and
routing those identified logs to their respective log handlers. Log processor 54 may also
perform log filtering based on log configuration information maintained on log server 50
and route processed logs to an appropriate log repository or forward to another log
system. Log processing can be buffered at the sending end to batch the call to the log
service for log creation enhancing throughput.

[0046] Log renderer **56** performs serialization of the log message body between XML format of the unified log file and the object structure of the specific event log files. A log render rer is required for each type of event log file to be supported. The service employs pairs of log handler/log renderers to handle specific formats which may be customized (user provided if one not previously available) for handling unlimited log types and log formats using XML as the message body.

[0047] Log handler **58** handles specific types of logs. They are used to display and store and forward log messages to differing destinations or target users. The log handlers process most of the log information in the log files.

[0048] Log consumers **38** and **48** are requesters or recipients of log file data. Log consumers **38** and **48** typically request log information in a "requester format" requiring conversion between the unified logging service format and the particular unique object structure of the requester. The conversion would be performed by the associated log handler **58** and log renderer **56**.

[0049] Repository **64** is storage medium for containment of the log data in the unified format of the unified log server. The repository performs storage duties for store and forward needs as well as persistent storage. The storage medium may be searched to find specific information related to or held within the unified logs.

[0050] **FIG. 4** illustrates a typical unidirectional flow of messages of the unified log server of **FIG.3**. Beginning with step **300** a log creation is initiated by invocation of log adapter in **302**. During **304** the log adapter is required to make a determination of the applicability of the log request with respect to the capability of the log adapter. If the log adapter cannot handle the request, the request and file are dumped. In this example log adapter **36** and log renderer **34** would be used in combination to reformat the log object from the sending node format or first structure into a predefined format of the common or unified logging service. In this manner the log renderer **34** functions much like a "plug-in" to log adapter **36** providing necessary function for the specific conversion

required. A suitable request being made allows buffering of the log to begin in step 306. As buffering is performed checks are made in 308 to determine if the buffer is full. If not full more data is simply added. When the buffer is filled the data is transmitted in step 310. A corresponding receipt in step 312 on unified logging server 50 causes the converted log file to be available for processing. First in step 314 a determination is made as to whether the log received is supported by the unified logging server 50. If not the log is dumped, other wise a determination is made in step 316 regarding the type of log to be processed and a corresponding log handler for that log type. Having made this determination in step 318 the log is sent to the indicated log handler. In step 320 the log handler determines which log consumer requested the log, processes the log according to the requester requirements and forwards the results to the target requester. During step 322 the requester consumes the log as requested or in the event no requester was found the data is stored for future use causing the instant action to cease at 324.

[0051] FIG. 5 is similar to FIG. 3 with the exception that the arrows denoting the path of messages throughout the service are bidirectional. FIG. 5 illustrates the capability of the unified logging service to process messages in more than a single direction. This bidirectional capability provides an opportunity to have a “dialog” between senders and “requesters” of log information. The components of FIG. 5 are similar to those of FIG. 3 and therefore will not be dealt with again.

[0052] FIG. 6 illustrates the flow of messages in two directions rather than the single direction of FIG. 4. Although the flow is explained from the top down through the service, it may be appreciated that the flow could also be initiated from the bottom to the top.

[0053] Beginning with step 500 a log creation is initiated by invocation of log adapter in 502. During 504 the log adapter is required to make a determination of the applicability of the log request with respect to the capability of the log adapter. If the log adapter cannot handle the request, the request and file are dumped. In this example log adapter 36 and log renderer 34 would be used in combination to reformat the log object

from the sending node format or first structure into a predefined format of the common or unified logging service. In this manner the log renderer 34 functions much like a "plug-in" to log adapter 36 providing necessary function for the specific conversion required. A suitable request being made allows buffering of the log to begin in step 506.

5 As buffering is performed checks are made in 508 to determine if the buffer is full. If not full more data is simply added. When the buffer is filled the data is transmitted in step 510. A corresponding receipt in step 512 on unified logging server 50 causes the converted log file to be available for processing. First in step 514 a determination is made as to whether the log received is supported by the unified logging server 50. If not
10 the log is dumped, other wise a determination is made in step 516 regarding the type of log to be processed and a corresponding log handler for that log type. Having made this determination in step 518 the log is sent to the indicated log handler. In step 520 the log handler determines which log consumer requested the log, processes the log according to the requester requirements and forwards the results to the target requester. During
15 step 522 the requester consumes the log as requested or in the event no requester was found the data is stored for future use. Departing from where the process of FIG. 4 stopped there is now step 524 in which the log consumer or recipient initiates an acknowledgement or call back message. If the call back message is in a format suitable for the log message format of the destination no conversion will be necessary, as in the
20 case of a simple acknowledgment. Although not shown, the log consumer 38 may also have been configured to contain a log adapter 36 and log renderer 34 as in client 30 providing a capability to create more complex messages in a predefined format of the unified logging service. However if the format of the call back message is different than that of the destination node, conversion will have to be performed. Conversion to the
25 destination node format will be performed by the log adapter and log renderer of the destination node to a first structure of the destination node. The log handler receives the call back in 526 and proceeds in 528 to determine the destination of the message by looking in the message header for target identifier of a log adapter. Having made the association in 528, the message is then sent in 530 to the identified log adapter. The
30 message is received in 532 at the specified log adapter and the log client renderer is

invoked to present the message. The flow terminates now at 534.

[0054] Referring now to FIG. 7 is a class diagram of interface and implementation classes of an exemplary embodiment.

[0055] The parent interface for the unified logging service 600 is CommonLogAPI 610 defining the high level structure of a log used in the service. A log consists of a log header and a log message body. A log processor must be able to handle both parts of the log in which the header is common across log types and the body portion varies. A log handler may be capable of handling more than one type of log concurrently.

[0056] Interfaces CommonLogClientAdapterAPI, CommonLogProcessorAPI, and CommonLogHandlerAPI, 612, 614 and 616 respectively are extensions of CommonLogAPI 610. Each defines an extension for a respective process of log creation, log processing and log handling.

[0057] CommonLogClientAdapterImpl 620 implements CommonLogClientAdapterAPI 612 interface forming the basis of the log adapter implementation. To accommodate differing types of logs, each log type has its own dedicated adapter. For example the CommonLogClientAuditLogAdapter 628 class is exemplary of a specific implementation for support of audit logs.

[0058] CommonLogProcessorImpl 622 implements interfaces of CommonLogProcessorAPI 614 forming the basis the log processor implementation. CommonLogProcessorImpl 622 provides the log type recognition services used to differentiate logs of one type from another. It also provides a capability to route specific log types to their respective log handlers as in those of the '63x' designation of FIG 7. Further support may be provided in the form of log filtering allowing logs to be selected based on a particular configuration specification. (see FIG. 12 for an example)

[0059] CommonLogHandlerImpl 624 implements interfaces of CommonLogHandlerAPI 616 forming the basis for the log handlers that have been

extended to handle the specific logs of the various types supported by the service. Examples of log types typically supported are shown in FIG. 7 designated as '63x'.

5 [0060] CommonLogMessageRendererAPI 618 provides the interfaces for the various specific log renderers. A log renderer is typically responsible for the serialization of the log message body between the object log structure and the XML format of the common or unified log.

10 [0061] Exemplary software of an embodiment may have AuditLogMessageRenderer 626 implemented as an extension of the interfaces of CommonLogMessageRenderAPI 618. Each different type of log would require a similar implementation of an associated log renderer, such as AuditLogMessageRenderer 626 with CommonLogMessageRenderAPI 618 being common across the renderers.

15 [0062] With reference to FIG. 8 a common logging service object model is presented. CommonLog 600 is presented again as in FIG. 7, containing the necessary high level interfaces for the service. CommonLogInfo 656 implements the interfaces of CommonLog 610, containing the log header and body information for a particular log.

20 [0063] LogHeader 650 is a set of interfaces defining the processing of the log header information. The supported components of the specific log will be defined in this object. LogHeaderInfo 658 implements the interfaces of LogHeader 650 containing the various components of the specific supported log header.

[0064] LogMessage 652 is a set of interfaces designed to acquire log message components from a target log. LogMessageInfo 660 implements the interfaces of LogMessage 652 allowing extensions to accommodate the various elements of the log message body.

25 [0065] AuditLogMessage 654 is an exemplary implementation of a set of interfaces in support of an audit type log within the unified logging services as defined.

AuditLogMessageInfo 662 is implemented as a child of AuditLogMessage 654 providing necessary extensions to describe the various elements specific to the audit log message body.

5 [0066] FIG. 9 details exemplary code shown using XML to define a typical association of a log type to an internal processing form as used in a preferred embodiment of a unified logging service.

[0067] Each type of logs in the common or unified logging service is defined with the following attributes:

Name: log type name

10 Renderer: the implementation class of log renderer associated with the type of log

Handlers: the list of log handlers that are registered to receive this type of logs

Handler name: the name of the log handler

Handler enable: the state of the log handler. Set this attribute to false to disable the log handler for the type of log.

15 [0068] The log system type differentiates the type of log systems from which the log files originate. Typical logs systems may be as follows, but not limited to, metering service (logs from a metering service through a metering event adapter), system web service (logs originating from a web service either directly or indirectly invoking the common logging web service interface) and application adapter (logs originating from
20 hosted applications are sent via an application adapter.

[0069] The log type itself differentiates the nature or purpose of the log. Typical log types are, but not limited to, billing, audit, message, and trace.

[0070] FIG. 10 details exemplary code showing a sample interface invoking the common logging service through the use of a web service interface to create a log.

Provision of web services is well known and will not be detailed further.

[0071] FIG. 11 is a sample of exemplary code used in an adapter of an embodiment of the common logging or unified logging service. Further is included a sample portion detailing specific inclusion of audit log adaptation. The adapter builds the common format header portion of the converted log file and the log unique message portion particular to the audit log type.

[0072] FIG. 12 is another sample of exemplary code of an embodiment of the unified logging service, but in this case it pertains to the log configuration information as used by the log processor component. The first portion of code deals with the loading of the log handler. Next the relationship between the log type and the log handler is made (in this example billing, audit), and then filtering information is provided. The filtering information is provided in the form of exclusionary information, that is the noted conditions will cause logs meeting those conditions to be not processed by the unified logging service.

[0073] In the code sample provided three log handlers are registered to the unified logging service; LogBilling Handler, LogConsoleHandler and LogDBHandler.

[0074] Each of the log types is further mapped to an appropriate log handler in a simple format such as that illustrated by the following table:

Log Type	LogConsolehandler	LogBillingHandler	LogDBHandler
Billing	X	X	X
Audit	X	X	

[0075] Further, in the example for filtering, any logs having the following format would be filtered out of the processing; a server name of "abc.xzy.com" or "pqr.xyz.com", or a log system type of "Metering Service" or WAS JRas", or log type of "Unknown", or "Billing" or "trace".

[0076] An application need not be a database management system, it may be a

mail system managing a collection of mail files exploiting flat file or hierarchical file means. Typically an application is one that manages its own storage allocation and the OS file system is unaware of application structure inherent within the application managed data. All elements of the invention may on one machine or many. The network
5 may or may not exist but communication among the components of the invention and between the invention and the applications is presumed to be evident. Application data may be accessed by programmatic means in conjunction with the application or unknown to the application, as a case may be made for efficiency. The agent of the invention may also provide forms of summarization and/or filtering on the data collected
10 from the application prior to send such data to the server.

[0077] The service may be made fully symmetrical by implementing adapter and renderer function within the log consumer or receiving node to have the same capability as the sending node or log client. Additionally the log adapter and log renderer function may be implemented solely on the server portion to allow for more lightweight client
15 support.

[0078] Although a preferred embodiment using XML as a form of describing log objects for converting to the common format has been shown it may be appreciated that other descriptive languages may be used in place. Additionally the common format is not important other than it must be capable of containing all types of desired log
20 information.

[0079] Although publish and subscribe style of message exchange has been shown in a preferred embodiment it may be appreciated that direct addressing may also be used. In direct addressing the sending node knows the target to receiving node and need not use the publish or subscribe capability nor additional directory services.

25 [0080] Of course, the above described embodiments are intended to be illustrative only and in no way limiting. The described embodiments of carrying out the invention are susceptible to many modifications of form, arrangement of parts, details

and order of operation. The invention, rather, is intended to encompass all such modification within its scop , as defin d by the claims.

WHAT IS CLAIMED IS:

1. A method of providing a unified logging service, for use in a network having a plurality of nodes capable of generating event logs, wherein said unified logging service having a unified log server and repository, comprising the steps of:

5 converting an event log file of a first log type and structure associated with a sending node into a predefined format;

transmitting said converted event log file over said network to said unified log server;

10 said unified log server receiving said converted event log file, determining said log type of said converted log file and routing said converted log file to a log handler compatible with said log type and said predefined format;

identifying a receiving node compatible with said log type for said converted event log file, and forwarding said converted event log file from said log handler to said identified receiving node.

- 15 2. The method of claim 1, further comprising the step of:

acknowledging receipt of said converted event log file by said identified receiving node to said sending node.

3. The method of claim 2, further comprising the step of:

20 converting said acknowledgement to said predefined format.

4. The method of claim 1, further comprising the step of :

storing said converted log file in said repository.

- 5
5. The method of claim 1, wherein said predefined format comprises a unified logging format including a header and a body.

6. The method of claim 5 wherein said header contains network information comprising:

a server identifier;

a log system identifier;

10 a log type identifier; and

a log create timestamp.

7. The method of claim 5 wherein said body contains transaction information as defined by said unified logging service, comprising:

15 a message portion, wherein said message portion is further defined by fields specific to said log type; and

a time stamp portion.

- 20 8. A computer readable storage medium tangibly embodying programmed instructions for performing the method of any of claims 1 to 7.

9. An apparatus for providing a unified logging service, used with event log files

having a first log type and structure, for use in a network having a plurality of nodes capable of generating event log files, comprising:

a unified logging server;

means for receiving said event log file at said unified logging server;

5 a log adapter for converting said event log file from said first structure to a predefined format;

means for determining a log type of said converted event log file and a log handler suitable for said log type;

means for forwarding said converted event log file to said log handler;

10 means for identifying a receiving node;

means for forwarding said converted event log file to said identified receiving node.

10. The apparatus of claim 9 further comprising:

a repository; and

15 means for storing said converted log file in said repository.

11. A system for providing a unified logging service, for use in a network having a plurality of nodes capable of generating event log files, wherein said unified logging service having a unified log server and repository, comprising:

a sending node having a first structure;

5 an event log file having a first log type associated with said sending node;

a log adapter for said sending node for converting said event log file from said first structure to a predefined format;

means for transmitting said converted event log file across said network to said unified logging server;

10 means for receiving said converted event log file at said unified logging server;

means for determining said log type of said converted event log file and a log handler suitable for said log type;

means for forwarding said converted event log file to said log handler;

means for identifying a receiving node for said converted event log file;

15 means for forwarding said converted event log file to said identified receiving node.

12. The system of claim 11 further comprising:

means for acknowledging receipt of said converted event log file by said identified receiving node to said sending node.

5 13. The system of claim 11 further comprising:

a log adapter for said receiving node for converting said predefined format to an event log file of said first structure.

14. The system of claim 12 further comprising:

10 means for converting said acknowledgement to said predefined format.

15. The system of claim 11 further comprising means for storing said converted log file in said repository.

15 16. A computer program product comprising computer program code means adapted to perform all of the steps of any of claims 1 to 7 when said program code is run on a computer.

17. An article comprising:

a computer readable modulated carrier signal;

means embedded in the signal to perform all of the steps of any of claims 1 to 7.

FIG. 1

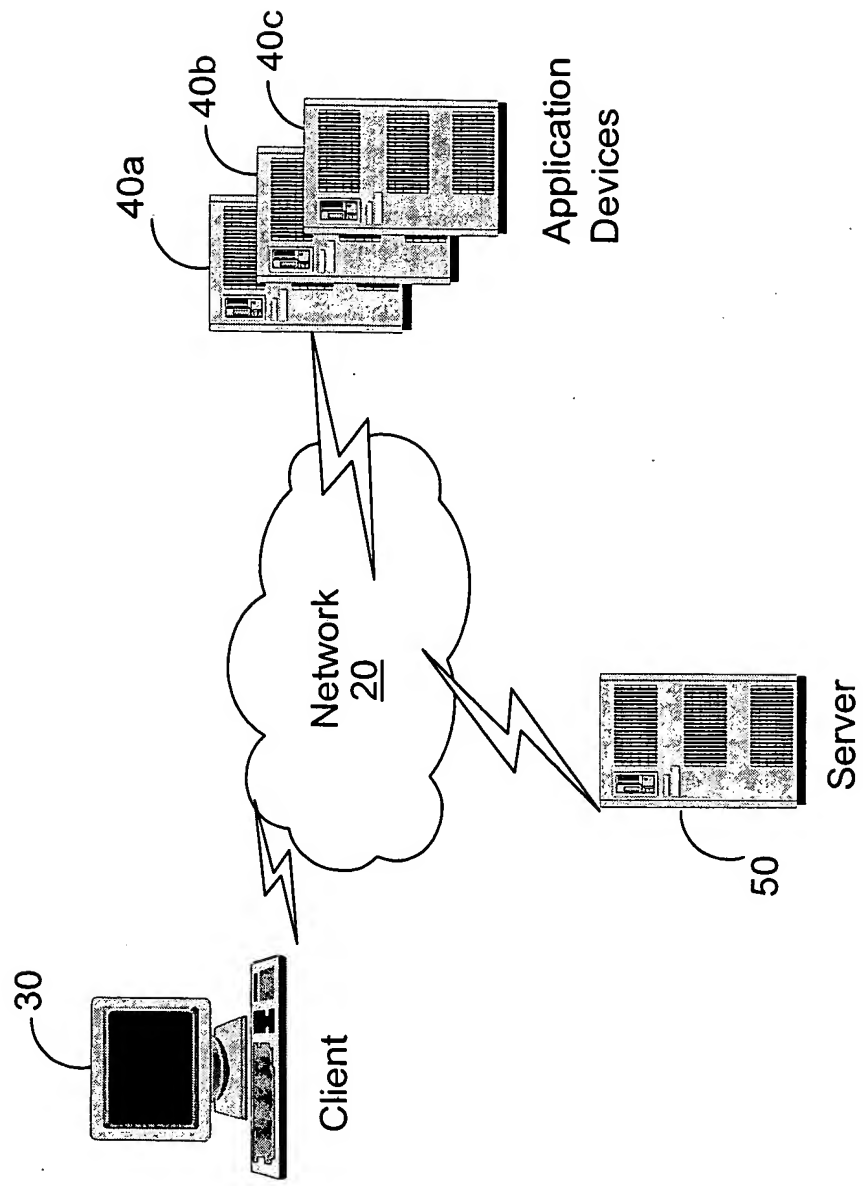
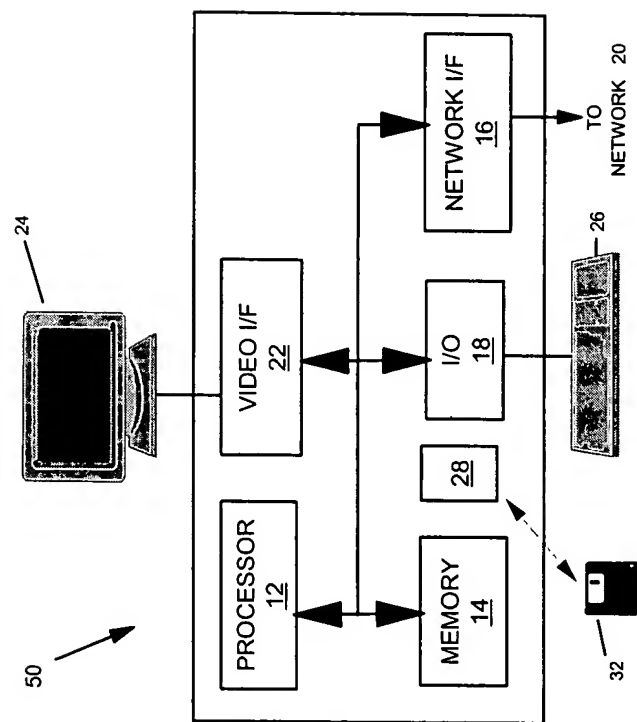


FIG. 2



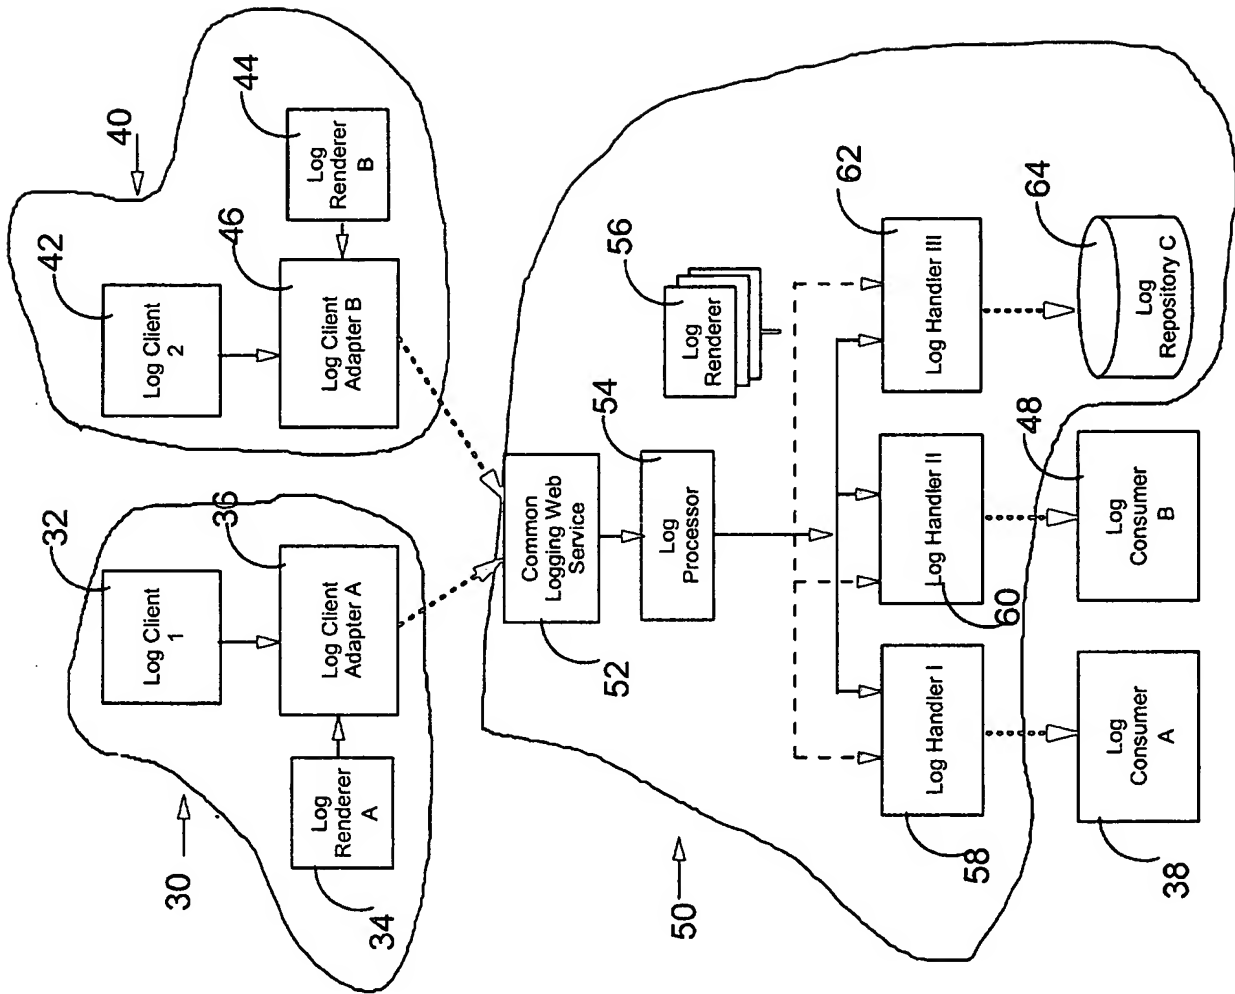


FIG. 3

FIG. 4

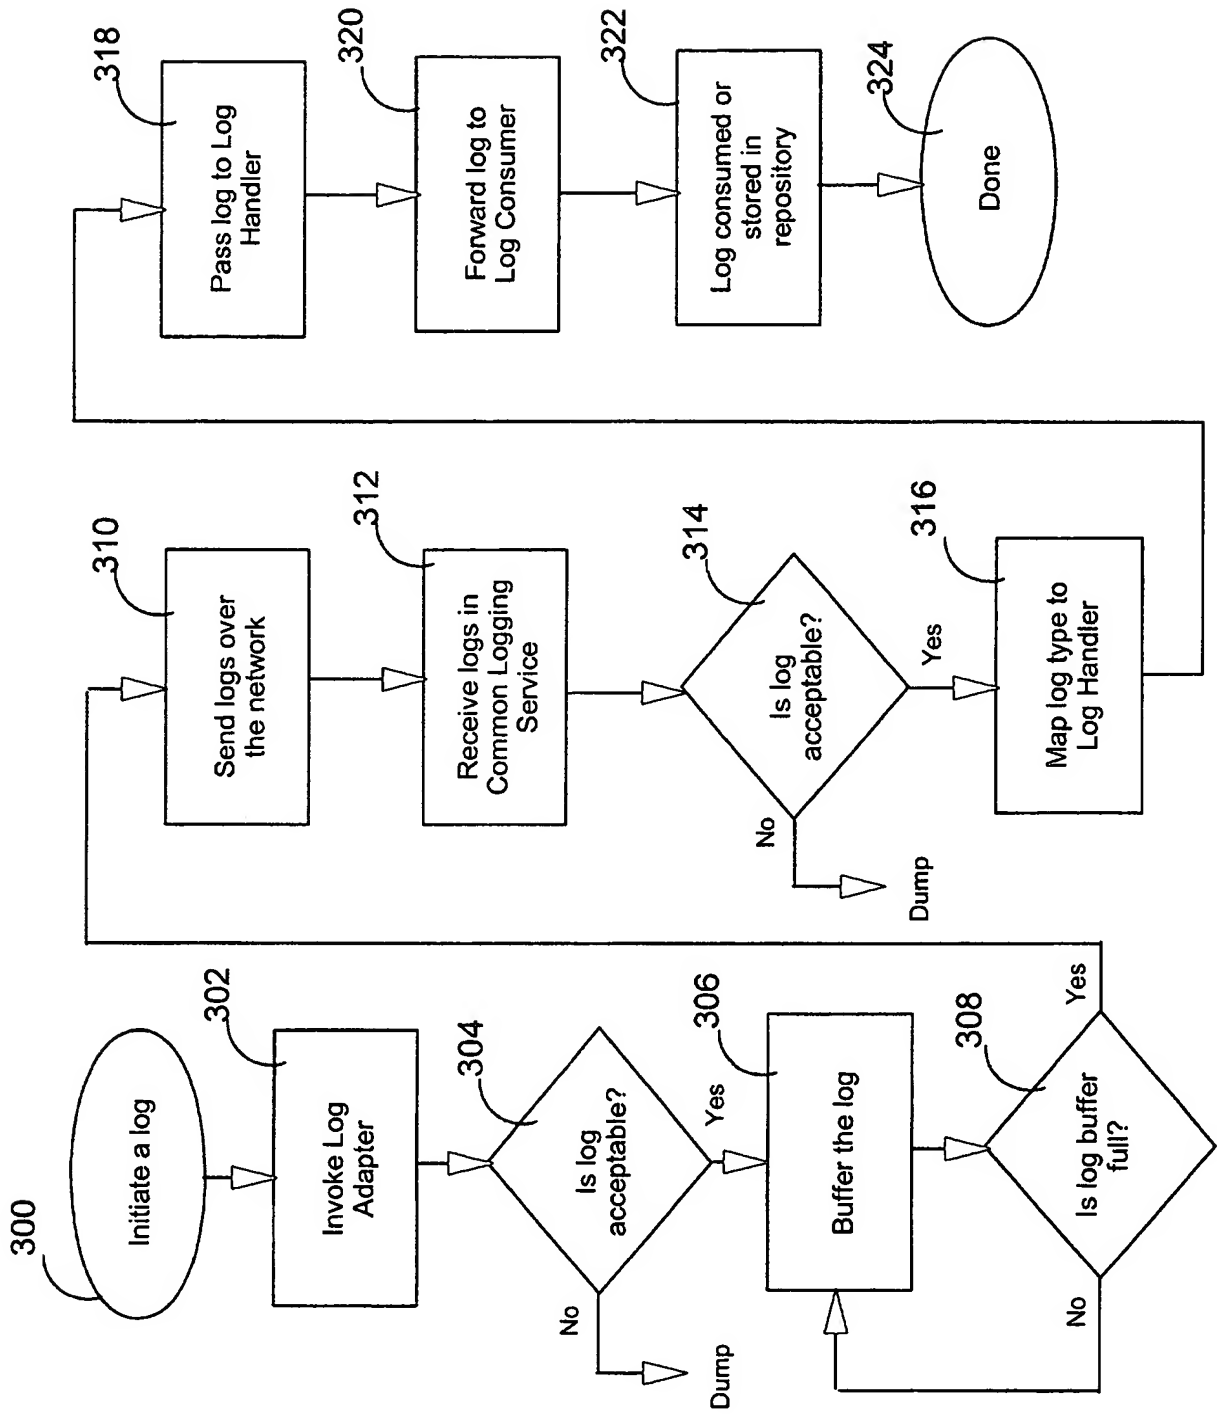


FIG. 5

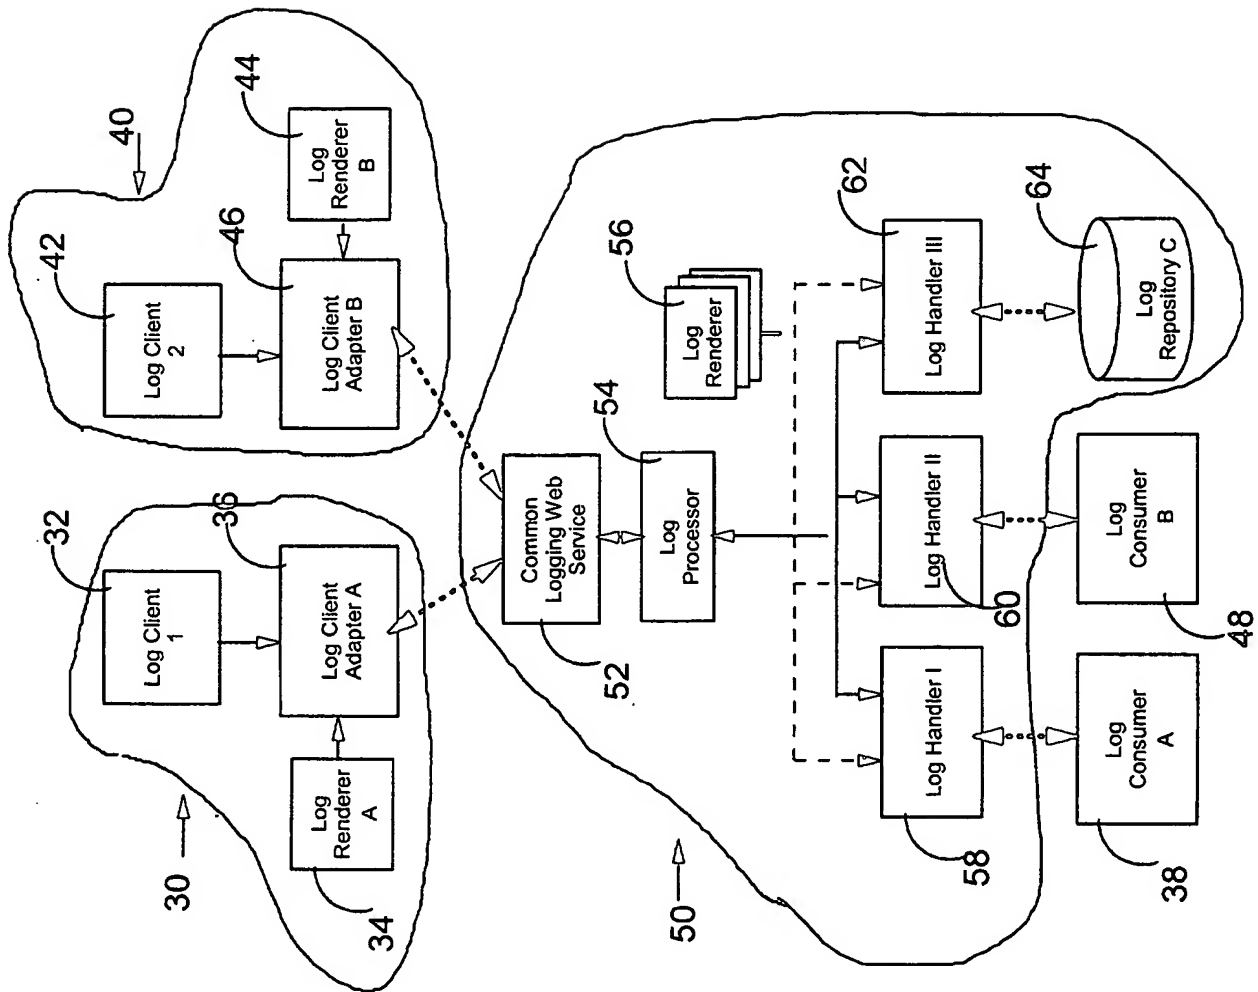


FIG. 6

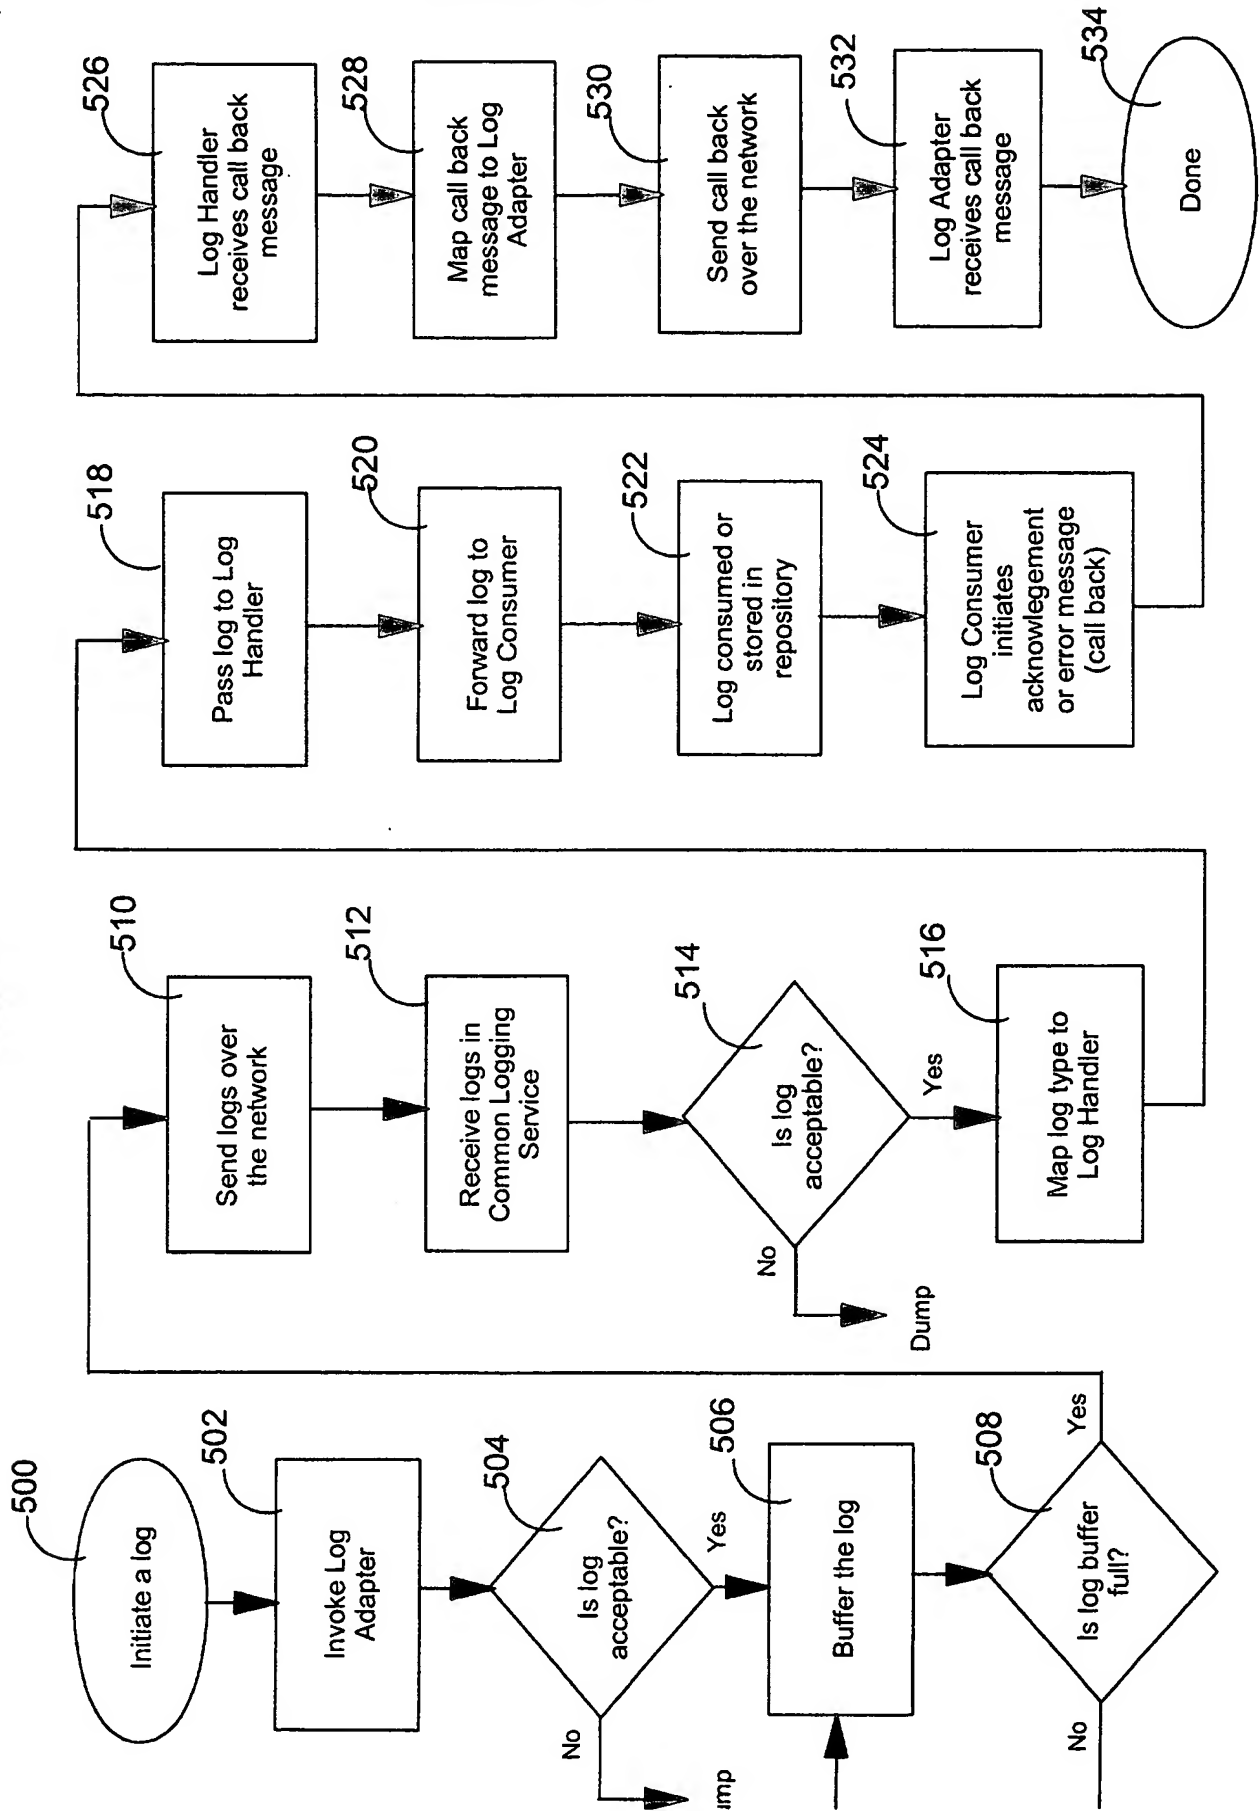


FIG. 7

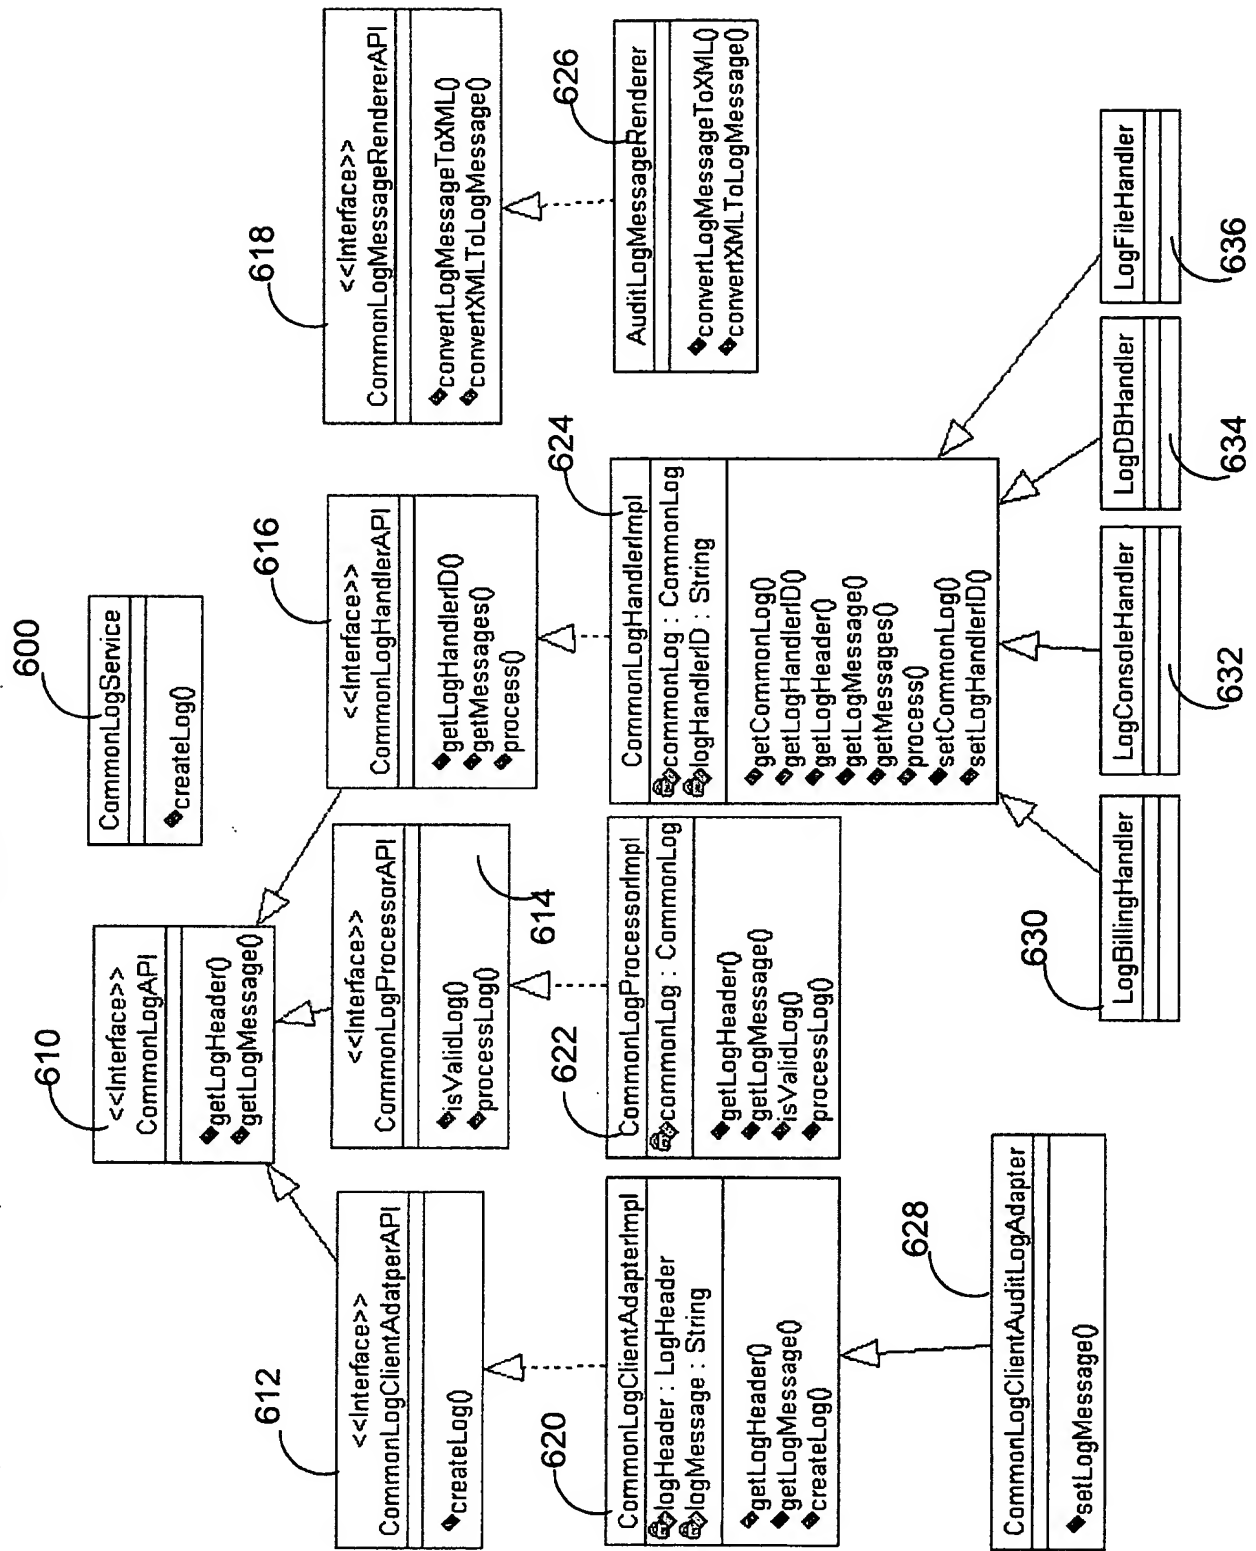


FIG. 8

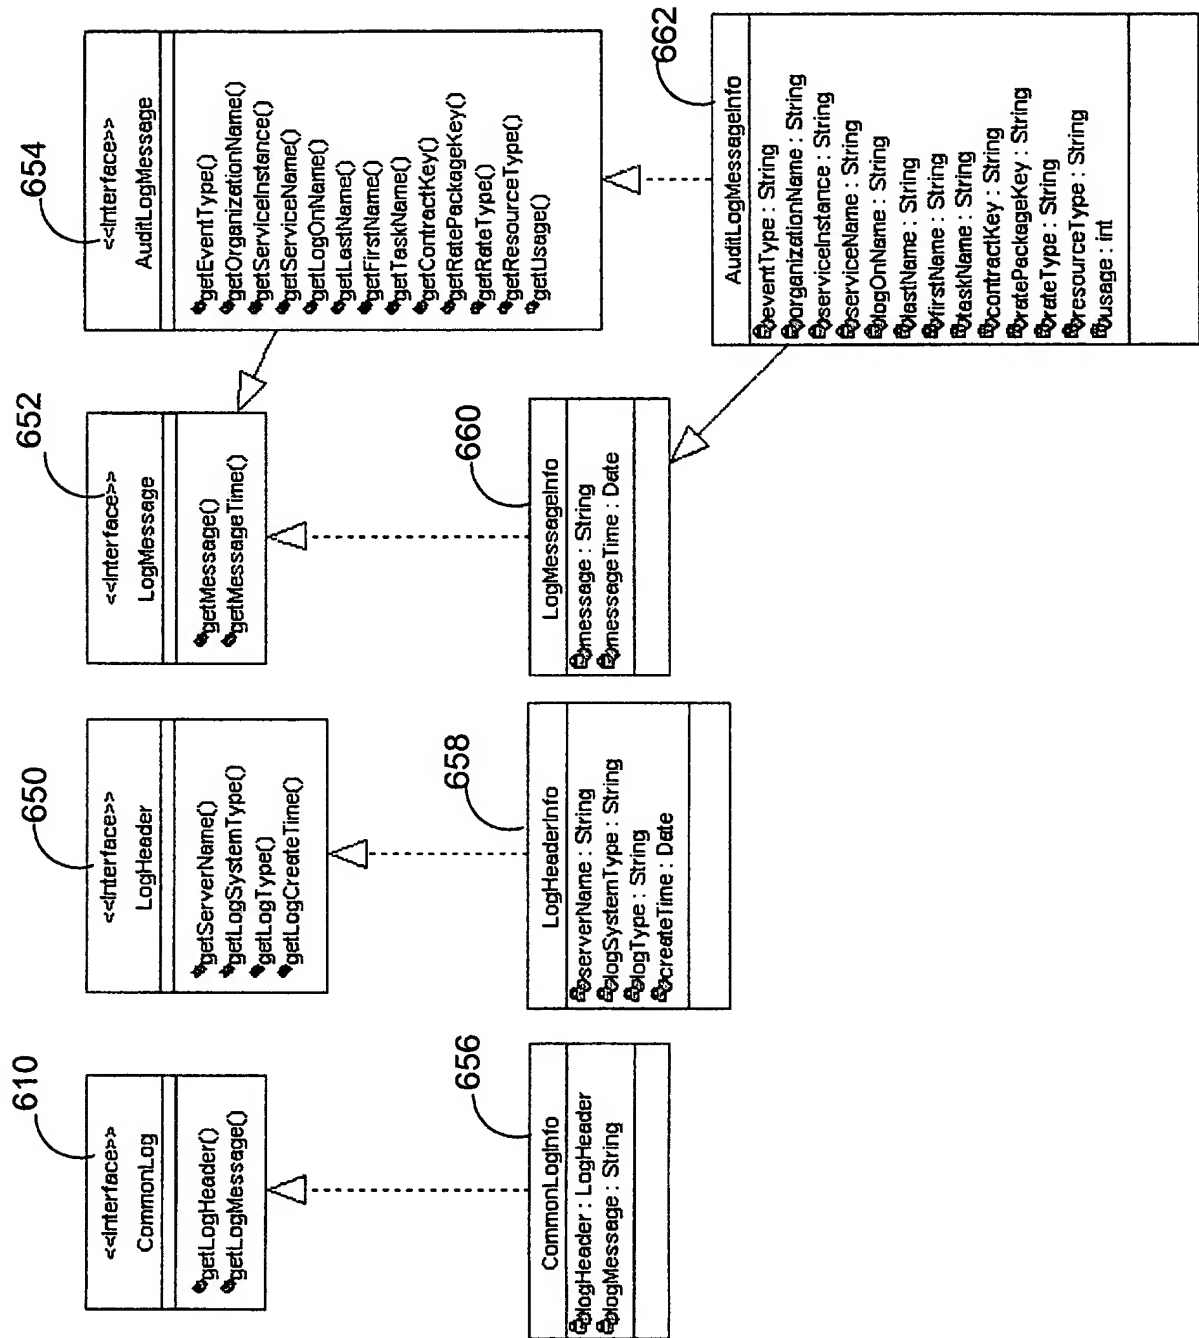


FIG. 9

```

:logTypes>
  <logType>
    <name>Error</name>
    <renderer>com.ibm.hosting.commonLogClientImpl.ErrorLogMessageRenderer</renderer>
    <handlers>
      <handler>
        <name>LogFileHandler</name>
        <enable>true</enable>
      </handler>
    </handlers>
  </logType>
</logType>
  <name>Metering</name>
  <renderer>com.ibm.hosting.commonLogClientImpl.MeteringLogMessageRenderer</renderer>
  <handlers>
    <handler>
      <name>LogConsoleHandler</name>
      <enable>true</enable>
    </handler>
    <handler>
      <name>MeteringLogHandler</name>
      <enable>true</enable>
    </handler>
    <handler>
      <name>LogBillingHandler</name>
      <enable>true</enable>
    </handler>
    <handler>
      <name>LogFileHandler</name>
      <enable>true</enable>
    </handler>
  </handlers>
</logType>

```

FIG. 9 contd.

```

<logType>
  <name>Audit</name>
  <renderer>com.ibm.hosting.commonLogClientImpl.AuditLogMessageRenderer</renderer>
  <handlers>
    <handler>
      <name>LogConsoleHandler</name>
      <enable>true</enable>
    </handler>
    <handler>
      <name>LogFileHandler</name>
      <enable>true</enable>
    </handler>
    <handler>
      <name>AuditLogHandler</name>
      <enable>true</enable>
    </handler>
  </handlers>
</logType>
<logType>
  <name>Message</name>
  <renderer>com.ibm.hosting.commonLogClientImpl.MessageLogMessageRenderer</renderer>
  <handlers>
    <handler>
      <name>MessageLogHandler</name>
      <enable>true</enable>
    </handler>
  </handlers>
</logType>
</logTypes>

```

FIG. 10

```

ServiceContextInfo ctx = new ServiceContextInfo();
ctx.setCredentials(userCredentials);
ctx.setForUser(userID);

//Construct the log header
LogHeaderInfo header = new LogHeaderInfo();
header.setLogSystemType(logSystemType);
header.setLogType("Audit");
header.setServerName(InetAddress.getLocalHost().getHostName());
header.setLogCreateTime(new Date() );

//Construct the audit log message body
AuditLogMessageInfo message = new AuditLogMessageInfo();
message.setEventType("Test Event Type");
message.setOrganizationName("o=alice0814b,dc=allegro");
message.setServiceName("Test Service Name");
message.setLogOnName("uid=spadmin,dc=users,dc=allegro");

//Instantiate the Audit Log Adapter
CommonLogClientAuditLogAdapter adapter = new CommonLogClientAuditLogAdapter();
adapter.setServiceContext(ctx);
adapter.setLogHeader(header);

```

FIG. 11

```

//Call the Common Logging Service client stub
com.ibm.hosting.clientStub.commonLog.CommonLog service =
    new com.ibm.hosting.clientStub.commonLog.CommonLog();

// Now use the service to get a PortType that we can call.
java.net.URL myURL =
    new java.net.URL("http://localhost:8080/commonLog/services");
CommonLogPortType port = service.getCommonLogPort(myURL, "commonLog");

com.ibm.hosting.model.commonLog.CommonLogInfo commonLogInfo =
    new com.ibm.hosting.model.commonLog.CommonLogInfo();
commonLogInfo.setLogHeader(logHeader);
commonLogInfo.setLogMessage(logMessage);

boolean a = port.createLog(commonLogInfo);
System.out.println("return value:" + a);

```

FIG. 12

```

<?xml version="1.0" ?>
<commonLog>
  <logHandlers>
    <logHandler>
      <name>LogConsoleHandler</name>
      <class>com.ibm.hosting.service.commonLogImpl.LogConsoleHandler</class>
    </logHandler>
    <logHandler>
      <name>LogBillingHandler</name>
      <class>com.ibm.hosting.service.commonLogImpl.LogBillingHandler</class>
    </logHandler>
    <logHandler>
      <name>LogDBHandler</name>
      <class>com.ibm.hosting.service.commonLogImpl.LogDBHandler</class>
    </logHandler>
  </logHandlers>
</commonLog>

<logTypes>
<logType>
  <name>Billing</name>
  <renderer>com.ibm.hosting.service.decode.AuditLogRenderImpl</renderer>
  <handlers>
    <handler>
      <name>LogConsoleHandler</name>
      <enable>true</enable>
    </handler>
    <handler>
      <name>LogDBHandler</name>
      <enable>true</enable>
    </handler>
    <handler>
      <name>LogBillingHandler</name>
      <enable>true</enable>
    </handler>
  </handlers>
</logType>

```

FIG. 12 contd.

```

<logType>
  <name>Audit</name>
  <renderer>com.ibm.hosting.service.decode.AuditLogRenderImpl</renderer>
  <handlers>
    <handler>
      <name>LogConsoleHandler</name>
      <enable>true</enable>
    </handler>
    <handler>
      <name>LogDBHandler</name>
      <enable>true</enable>
    </handler>
  </handlers>
</logType>
</logTypes>

<logFilter>
  <serverNames>
    <serverName>abc.xyz.com</serverName>
    <serverName>pqr.xyz.com</serverName>
  </serverNames>
  <logSystemTypes>
    <logSystemType>Metering Service</logSystemType>
    <logSystemType>WAS JRas</logSystemType>
  </logSystemTypes>
  <logTypes>
    <logType>Unknown</logType>
    <logType>Billing</logType>
    <logType>Trace</logType>
  </logTypes>
</logFilter>
</commonLog>

```